



PROPRIETARY NOTE
THIS SPECIFICATION IS THE PROPERTY OF BOE HF AND SHALL NOT BE REPRODUCED OR COPIED WITHOUT THE WRITTEN PERMISSION OF BOE HF AND MUST BE RETURNED TO BOE HF UPON ITS REQUEST

SPEC. NUMBER

PRODUCT GROUP

Rev.

ISSUE DATE

PAGE

TFT-LCD

P1

1 OF 36

HB125WX1-100

Preliminary Product Specification

Rev. P1

HEFEI BOE OPTOELECTRONICS TECHNOLOGY

 京东方 BOE	PRODUCT GROUP	REV	ISSUE DATE
	TFT- LCD PRODUCT	P1	
SPEC. NUMBER	SPEC. TITLE	PAGE	
	HB125WX1-100 Preliminary Product Specification	3 OF 36	

Contents


No.	Items	Page
1.0	General Description	4
2.0	Absolute Maximum ratings	6
3.0	Electrical specifications.	7
4.0	Optical specifications.	9
5.0	Interface Connection	14
6.0	Signal Timing Specification	18
7.0	Input Signals, Display Colors & Gray Scale of Colors	20
8.0	Power Sequence	21
9.0	Connector description	22
10.0	Mechanical Characteristics	23
11.0	Reliability Test	24
12.0	Handling & Cautions.	24
13.0	Label	25
14.0	Packing information	27
15.0	Mechanical Outline Dimension	28
16.0	EDID Table	30

 京东方 BOE	PRODUCT GROUP	REV	ISSUE DATE
	TFT- LCD PRODUCT	P1	
SPEC. NUMBER	SPEC. TITLE	PAGE	
	HB125WX1-100 Preliminary Product Specification	4 OF 36	

1.0 GENERAL DESCRIPTION

1.1 Introduction

HB125WX1-100 is a color active matrix TFT LCD module using amorphous silicon TFT's (Thin Film Transistors) as an active switching devices. This module has a 12.5 inch diagonally measured active area with WXGA resolutions (1366 horizontal by 768 vertical pixel array). Each pixel is divided into RED, GREEN, BLUE dots which are arranged in vertical Stripe and this module can display 262,144 colors. The TFT-LCD panel used for this module is a low reflection and higher color type. Therefore, this module is suitable for Notebook PC. The LED Driver for back-light driving is built in this model. All input signals are eDP interface compatible.

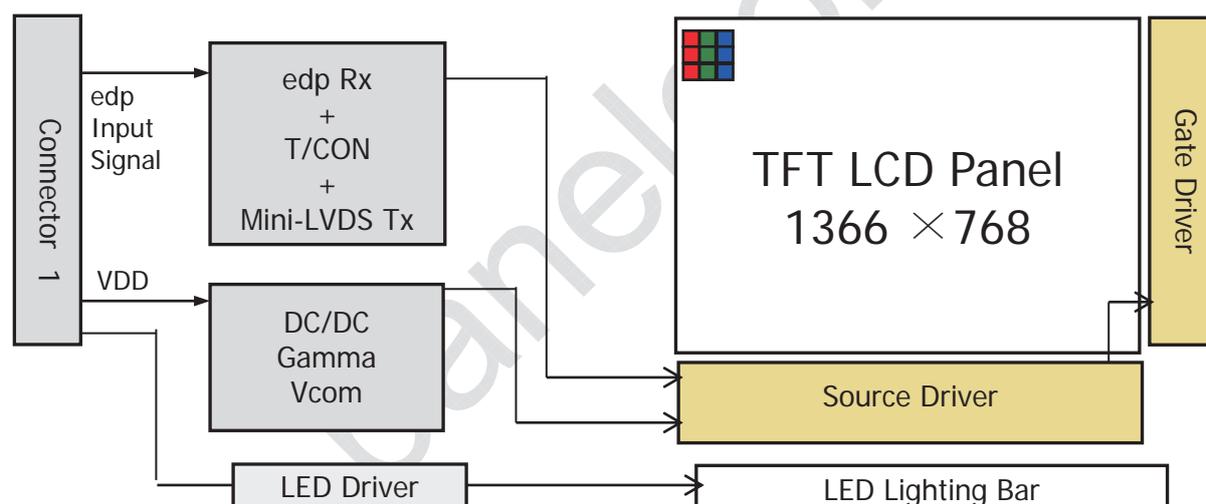

1.2 Features

- 1 lane eDP Interface with 2.7Gbps Link Rates
- Thin and light weight
- 6-bit color depth, display 262K colors
- Single LED Lighting Bar. (Down side/Horizontal Direction)
- Left/Right Mounting frame
- Green Product (RoHS & Halogen free product)
- On board LED Driving circuit
- Low driving voltage and low power consumption
- On board EDID chip

 京东方 BOE	PRODUCT GROUP	REV	ISSUE DATE
	TFT- LCD PRODUCT	P1	
SPEC. NUMBER	SPEC. TITLE	PAGE	
	HB125WX1-100 Preliminary Product Specification	5 OF 36	

1.3 Application

- Notebook PC

1.4 General Specification

The followings are general specifications at the model HB125WX1-100. (listed in Table 1.)

<Table 1. General Specifications>

Parameter	Specification	Unit	Remarks
Active area	276.615(H) × 155.52(V)	mm	
Number of pixels	1366 (H) × 768 (V)	pixels	
Pixel pitch	67.5 × RGB×202.5	um	
Pixel arrangement	RGB Vertical stripe		
Display colors	262K	colors	
Display mode	Normally White		
Dimensional outline	300.4(H)*179.5(V)*3.8(Max)	mm	
Weight	280 (max)	g	
Surface treatment	Anti Glare		
Back-light	Lower edge side, 1-LED Lighting Bar type		Note 1
Power consumption	PD : 0.8 (max)	W	
	PBL :2.1(max)	W	
	Ptotal :2.9(max)	W	

Notes : 1. LED Lighting Bar (30*LED Array)



PRODUCT GROUP

REV

ISSUE DATE

TFT- LCD PRODUCT

P1

SPEC. NUMBER

SPEC. TITLE

PAGE

HB125WX1-100 Preliminary Product Specification

6 OF 36

2.0 ABSOLUTE MAXIMUM RATINGS


The followings are maximum values which, if exceed, may cause faulty operation or damage to the unit. The operational and non-operational maximum voltage and current values are listed in Table 2.

< Table 2. Absolute Maximum Ratings >

Ta=25+/-2°C

Parameter	Symbol	Min.	Max.	Unit	Remarks
Power Supply Voltage	V _{DD}	-0.3	4.0	V	Note 1
Logic Supply Voltage	V _{IN}	V _{SS} -0.3	V _{DD} +0.3	V	
Operating Temperature	T _{OP}	0	+50	°C	Note 2
Storage Temperature	T _{ST}	-20	+60	°C	

- Notes : 1. Permanent damage to the device may occur if maximum values are exceeded functional operation should be restricted to the condition described under normal operating conditions.
2. Temperature and relative humidity range are shown in the figure below.
 95 % RH Max. (40 °C ≥ Ta)
 Maximum wet - bulb temperature at 39 °C or less. (Ta > 40 °C) No condensation.

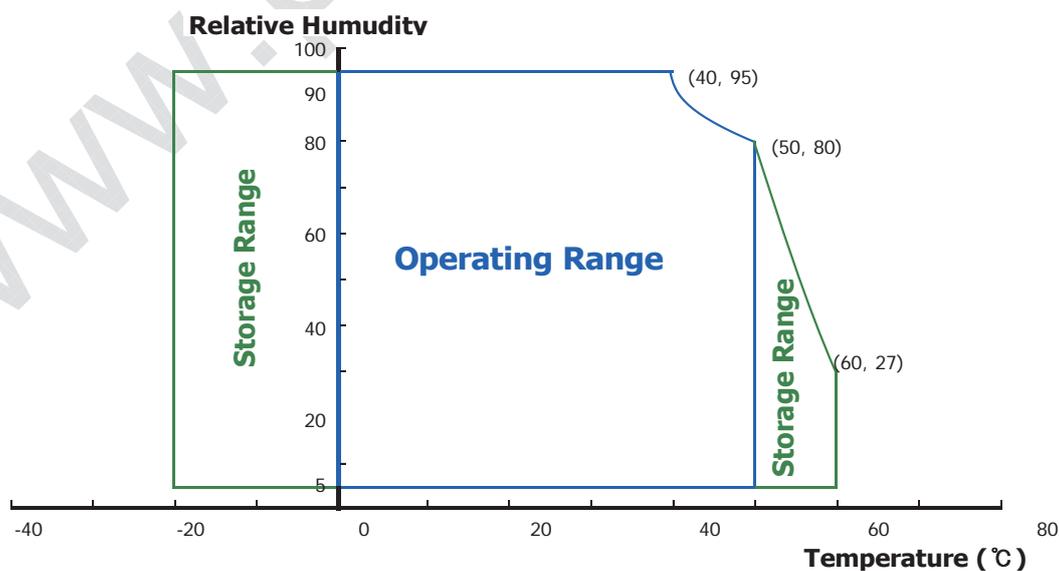

6

 京东方 BOE	PRODUCT GROUP	REV	ISSUE DATE
	TFT- LCD PRODUCT	P1	
SPEC. NUMBER	SPEC. TITLE	PAGE	
	HB125WX1-100 Preliminary Product Specification	7 OF 36	

3.0 ELECTRICAL SPECIFICATIONS

3.1 Electrical Specifications

< Table 3. Electrical specifications >


Ta=25+/-2°C

Parameter		Min.	Typ.	Max.	Unit	Remarks
Power Supply Voltage	V _{DD}	3.0	3.3	3.6	V	Note 1
Permissible Input Ripple Voltage	V _{RF}	-	-	100	mV	At V _{DD} = 3.3V
Power Supply Current	I _{DD}	-	190	-	mA	Note 1
Positive-going Input Threshold Voltage	V _{IT+}	-	-	100	mV	V _{cm} = 1.2V typ.
Negative-going Input Threshold Voltage	V _{IT-}	-100	-	-	mV	
Differential Input Voltage	V _{ID}	380	-	1200	mV	
Power Consumption	P _D	-	0.63	0.8	W	Note 1
	P _{BL}	-	1.8	2.1	W	Note 2
	P _{total}	-	2.43	2.9	W	

Notes : 1. The supply voltage is measured and specified at the interface connector of LCM.
The current draw and power consumption specified is for 3.3V at 25°C.

a) Typ : Window XP pattern

b) Max : Horizontal 1 line skip pattern



2. Calculated value for reference (V_{LED} × I_{LED})

 京东方 BOE	PRODUCT GROUP	REV	ISSUE DATE
	TFT- LCD PRODUCT	P1	
SPEC. NUMBER	SPEC. TITLE	PAGE	
	HB125WX1-100 Preliminary Product Specification	8 OF 36	

3.2 Backlight Unit

< Table 4. LED Driving guideline specifications >

Ta=25+/-2°C


Parameter		Min.	Typ.	Max.	Unit	Remarks
LED Forward Voltage	V _F			3.0	V	-
LED Forward Current	I _F	-	20		mA	-
LED Power Consumption	P _{LED}			2.1	W	Note 1
LED Life-Time	N/A	15,000	-	-	Hour	I _F = 20mA
Power supply voltage for LED Driver	V _{LED}	5.5	12	21	V	
EN Control Level	Backlight on	2.0		5.0	V	
	Backlight off	0		1.0	V	
PWM Control Level	PWM High Level	2.0		5.0	V	
	PWM Low Level	0		0.1	V	
PWM Control Frequency	F _{PWM}	100	-	10,000	Hz	
Duty Ratio	-	1	-	100	%	

Notes : 1. Power supply voltage 12V for LED Driver, Driver efficiency 85%,
 Calculator Value for reference $I_F \times V_F \times 30 / 0.85 = P_{LED}$

2. The LED Life-time define as the estimated time to 50% degradation of initial luminous.

 京东方 BOE	PRODUCT GROUP	REV	ISSUE DATE
	TFT- LCD PRODUCT	P1	
SPEC. NUMBER	SPEC. TITLE	PAGE	
	HB125WX1-100 Preliminary Product Specification	9 OF 36	

3.3 LED structure

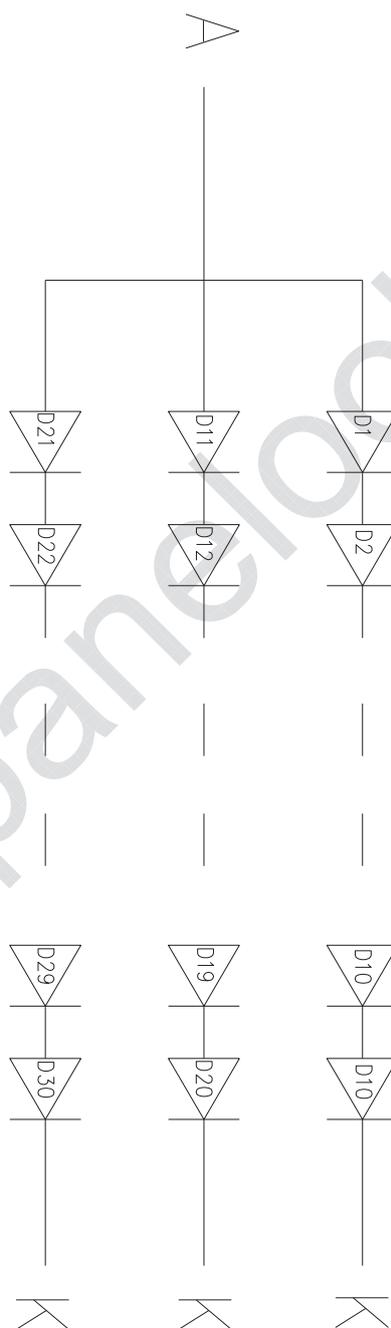

 京东方 BOE	PRODUCT GROUP	REV	ISSUE DATE
	TFT- LCD PRODUCT	P1	
SPEC. NUMBER	SPEC. TITLE HB125WX1-100 Preliminary Product Specification	PAGE 10 OF 36	

4.0 OPTICAL SPECIFICATION

4.1 Overview

The test of Optical specifications shall be measured in a dark room (ambient luminance ≤ 1 lux and temperature = $25 \pm 2^\circ\text{C}$) with the equipment of Luminance meter system (Goniometer system and TOPCON BM-5) and test unit shall be located at an approximate distance 50cm from the LCD surface at a viewing angle of θ and Φ equal to 0° . We refer to $\theta=0$ ($=\theta_3$) as the 3 o'clock direction (the "right"), $\theta=90$ ($=\theta_{12}$) as the 12 o'clock direction ("upward"), $\theta=180$ ($=\theta_9$) as the 9 o'clock direction ("left") and $\theta=270$ ($=\theta_6$) as the 6 o'clock direction ("bottom"). While scanning θ and/or Φ , the center of the measuring spot on the Display surface shall stay fixed. The backlight should be operating for 30 minutes prior to measurement. VDD shall be $3.3 \pm 0.3\text{V}$ at 25°C . Optimum viewing angle direction is 6 o'clock.

4.2 Optical Specifications

<Table 5. Optical Specifications>

Parameter		Symbol	Condition	Min.	Typ.	Max.	Unit	Remark
Viewing Angle range	Horizontal	θ_3	CR > 10	40	45	-	Deg.	Note 1
		θ_9		40	45	-	Deg.	
	Vertical	θ_{12}		15	20	-	Deg.	
		θ_6		30	40	-	Deg.	
Luminance Contrast ratio		CR	$\theta = 0^\circ$		500			Note 2
Luminance of White	5 Points	Y_w	$\theta = 0^\circ$ ILED = 20mA	170	200	-	cd/m ²	Note 3
White Luminance uniformity	5 Points	ΔY_5		80	-	-		Note 4
	13 Points	ΔY_{13}		65	-	-		
White Chromaticity		x_w	$\theta = 0^\circ$	0.288	0.313	0.338		Note 5
		y_w		0.304	0.329	0.354		
Reproduction of color	Red	x_R	$\theta = 0^\circ$	-0.025	0.592	+0.025		
		y_R			0.347			
	Green	x_G			0.329			
		y_G			0.571			
	Blue	x_B			0.151			
		y_B			0.115			
Response Time (Rising + Falling)		T_{RT}	Ta = 25°C $\theta = 0^\circ$	-	16	25	ms	Note 6
Cross Talk		CT	$\theta = 0^\circ$	-	-	2.0	%	Note 7

10

 京东方 BOE	PRODUCT GROUP	REV	ISSUE DATE
	TFT- LCD PRODUCT	P1	
SPEC. NUMBER	SPEC. TITLE	PAGE	
	HB125WX1-100 Preliminary Product Specification	11 OF 36	

Notes :

1. Viewing angle is the angle at which the contrast ratio is greater than 10. The viewing angles are determined for the horizontal or 3, 9 o'clock direction and the vertical or 6, 12 o'clock direction with respect to the optical axis which is normal to the LCD surface (see FIGURE 1).

2. Contrast measurements shall be made at viewing angle of $\Theta = 0$ and at the center of the LCD surface. Luminance shall be measured with all pixels in the view field set first to white, then to the dark (black) state .
(see FIGURE 1) Luminance Contrast Ratio (CR) is defined mathematically.

$$CR = \frac{\text{Luminance when displaying a white raster}}{\text{Luminance when displaying a black raster}}$$

3. Center Luminance of white is defined as luminance values of 5 point average across the LCD surface. Luminance shall be measured with all pixels in the view field set first to white. This measurement shall be taken at the locations shown in FIGURE 2 for a total of the measurements per display.

4. The White luminance uniformity on LCD surface is then expressed as : $\Delta Y = \text{Minimum Luminance of 5(or 13) points} / \text{Maximum Luminance of 5(or 13) points}$.
(see FIGURE 2 and FIGURE 3).

5. The color chromaticity coordinates specified in Table 5 shall be calculated from the spectral data measured with all pixels first in red, green, blue and white. Measurements shall be made at the center of the panel.


6. The electro-optical response time measurements shall be made as FIGURE 4 by switching the "data" input signal ON and OFF. The times needed for the luminance to change from 10% to 90% is T_r , and 90% to 10% is T_d .

7. Cross-Talk of one area of the LCD surface by another shall be measured by comparing the luminance (Y_A) of a 25mm diameter area, with all display pixels set to a gray level, to the luminance (Y_B) of that same area when any adjacent area is driven dark.
(See FIGURE 5).

 京东方 BOE	PRODUCT GROUP	REV	ISSUE DATE
	TFT- LCD PRODUCT	P1	
SPEC. NUMBER	SPEC. TITLE	PAGE	
	HB125WX1-100 Preliminary Product Specification	12 OF 36	


4.3 Optical measurements

Figure 1. Measurement Set Up

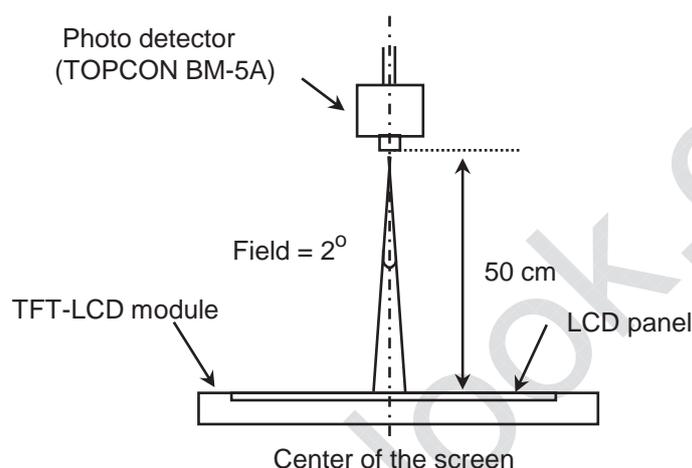

Optical characteristics measurement setup


Figure 2. White Luminance and Uniformity Measurement Locations (5 points)

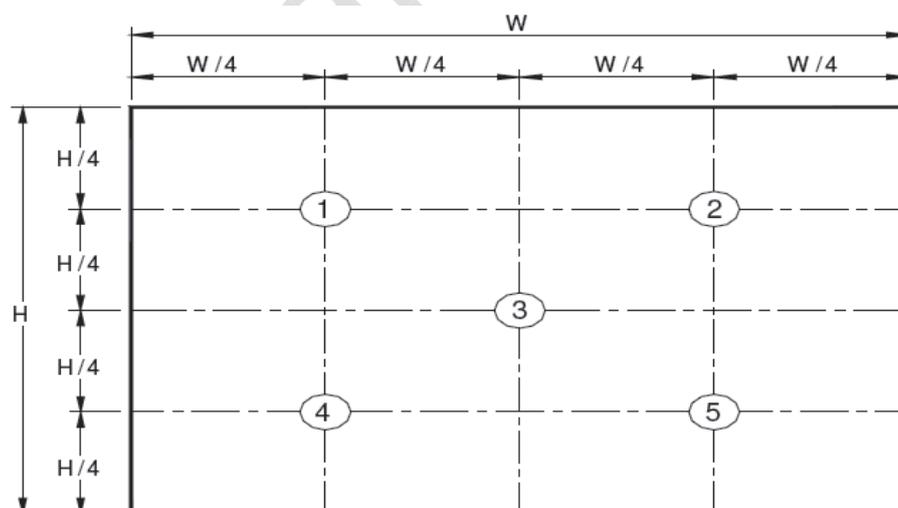

Center Luminance of white is defined as luminance values of center 5 points across the LCD surface. Luminance shall be measured with all pixels in the view field set first to white. This measurement shall be taken at the locations shown in FIGURE 2 for a total of the measurements per display.


 京东方 BOE	PRODUCT GROUP	REV	ISSUE DATE
	TFT- LCD PRODUCT	P1	
SPEC. NUMBER	SPEC. TITLE	PAGE	
	HB125WX1-100 Preliminary Product Specification	13 OF 36	

Figure 3. Uniformity Measurement Locations (13 points)

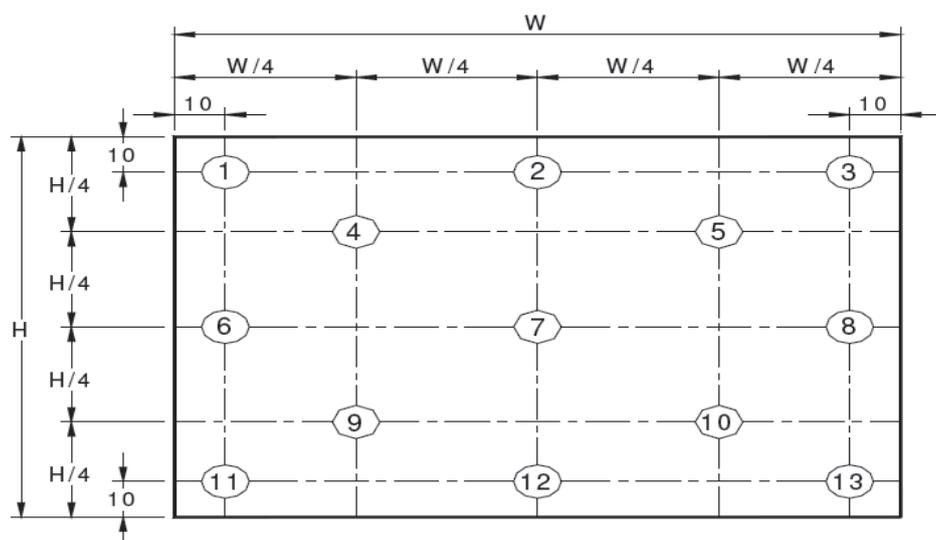

The White luminance uniformity on LCD surface is then expressed as : $\Delta Y_5 = \text{Minimum Luminance of five points} / \text{Maximum Luminance of five points}$ (see FIGURE 2) , $\Delta Y_{13} = \text{Minimum Luminance of 13 points} / \text{Maximum Luminance of 13 points}$ (see FIGURE 3).


Figure 4. Response Time Testing

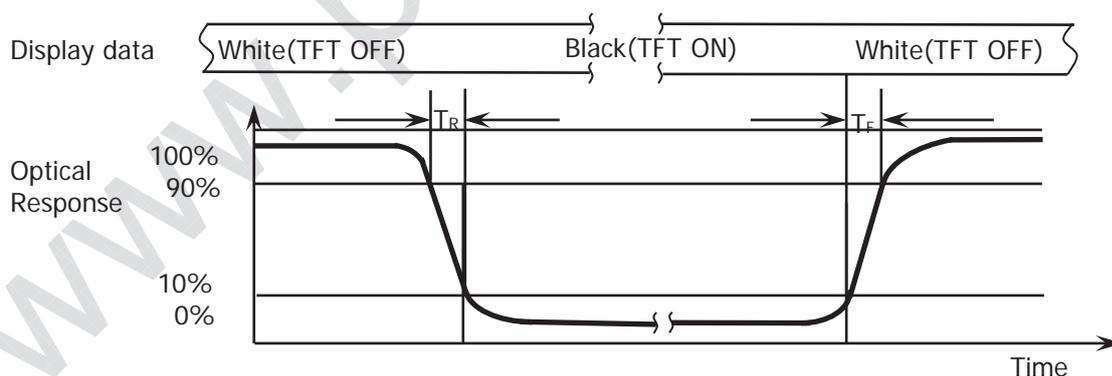

The electro-optical response time measurements shall be made as shown in FIGURE 4 by switching the “data” input signal ON and OFF. The times needed for the luminance to change from 10% to 90% is T_d and 90% to 10% is T_r .

 京东方 BOE	PRODUCT GROUP	REV	ISSUE DATE
	TFT- LCD PRODUCT	P1	
SPEC. NUMBER	SPEC. TITLE HB125WX1-100 Preliminary Product Specification	PAGE 14 OF 36	

Figure 5. Cross Modulation Test Description

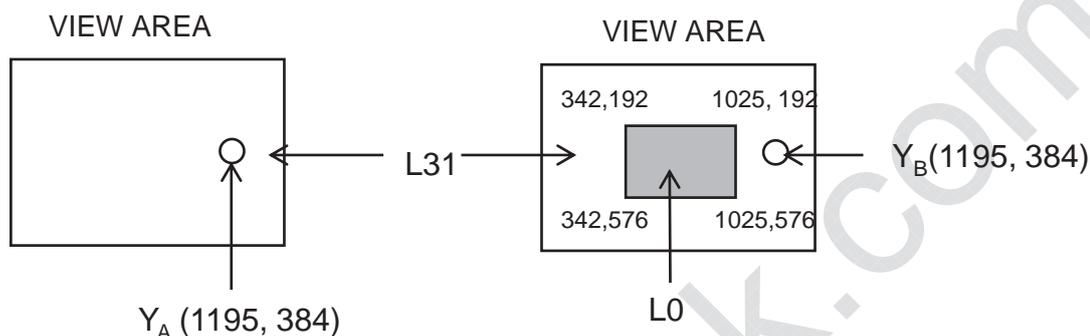

$$\text{Cross-Talk (\%)} = \left| \frac{Y_B - Y_A}{Y_A} \right| \times 100$$

Where:

Y_A = Initial luminance of measured area (cd/m²)

Y_B = Subsequent luminance of measured area (cd/m²)

The location measured will be exactly the same in both patterns

Cross-Talk of one area of the LCD surface by another shall be measured by comparing the luminance (Y_A) of a 25mm diameter area, with all display pixels set to a gray level, to the luminance (Y_B) of that same area when any adjacent area is driven dark (Refer to FIGURE 5).

 京东方 BOE	PRODUCT GROUP	REV	ISSUE DATE
	TFT- LCD PRODUCT	P1	
SPEC. NUMBER	SPEC. TITLE	PAGE	
	HB125WX1-100 Preliminary Product Specification	15 OF 36	

5.0 INTERFACE CONNECTION.

5.1 Electrical Interface Connection

The electronics interface connector is STM or Compatible or equivalent. The mating connector part number is I-PEX 20454-030T or Compatible. The connector interface pin assignments are listed in Table 6.


<Table 6. Pin Assignments for the Interface Connector>

Terminal	Symbol	Functions
Pin No.	Symbol	Description
1	DBC_EN	DBC enable from +2.5V to +3.3V ; DBC disable on Grounding
2	H_GND	High Speed Ground
3	NC	No Connection
4	NC	No Connection
5	H_GND	High Speed Ground
6	LANE0_N	eDP RX channel 0 negative
7	LANE0_P	eDP RX channel 0 positive
8	H_GND	High Speed Ground
9	AUX_CH_P	eDP AUX CH positive
10	AUX_CH_N	eDP AUX CH negative
11	H_GND	High Speed Ground
12	LCD_VCC	LCD logic and driver power
13	LCD_VCC	LCD logic and driver power
14	LCD_Self_Test	LCD Panel Self Test Enable
15	LCD_GND	LCD logic and driver ground
16	LCD_GND	LCD logic and driver ground
17	HPD	Hot plug detect signal pin
18	BL_GND	Backlight ground
19	BL_GND	Backlight ground
20	BL_GND	Backlight ground
21	BL_GND	Backlight ground
22	BL_ENABLE	Backlight On/Off
23	BL_PWM	System PWM Signal Input
24	NC	No Connection
25	NC	No Connection
26	BL_POWER	Backlight power
27	BL_POWER	Backlight power
28	BL_POWER	Backlight power
29	BL_POWER	Backlight power
30	NC	No Connection



 京东方 BOE	PRODUCT GROUP	REV	ISSUE DATE
	TFT- LCD PRODUCT	P1	
SPEC. NUMBER	SPEC. TITLE	PAGE	
	HB125WX1-100 Preliminary Product Specification	16 OF 36	

5.2. eDP Interface

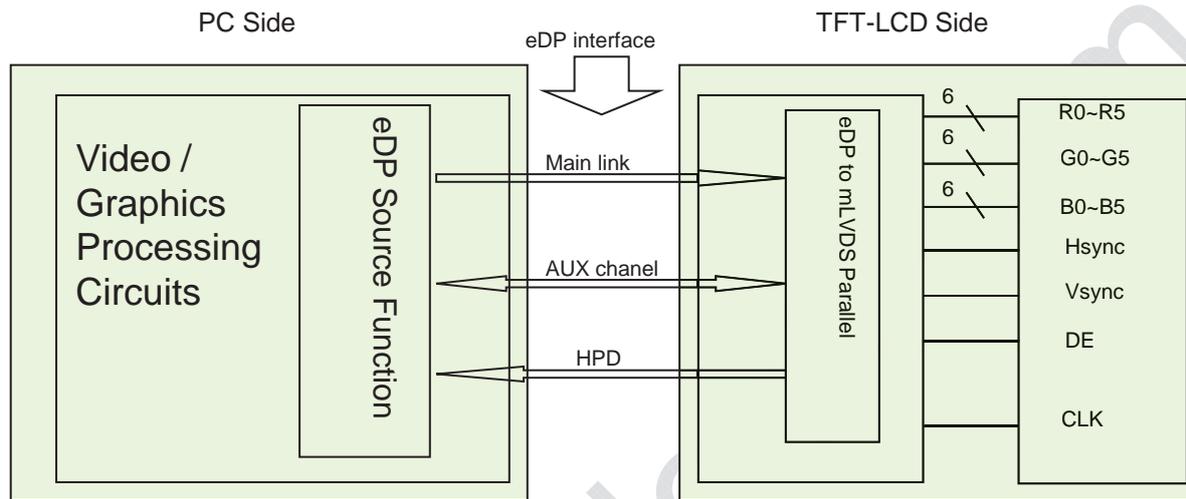

Note. Transmitter : Parade DP501 or equivalent.
 Transmitter is not contained in Module.



京东方
BOE

PRODUCT GROUP

REV

ISSUE DATE

TFT- LCD PRODUCT

P1

SPEC. NUMBER

SPEC. TITLE

PAGE

HB125WX1-100 Preliminary Product Specification

17 OF 36

5.3.eDP Input signal

Lane 0	
R0-5:0	G0-5:4
G0-3:0	B0-5:2
B0-1:0	R1-5:0
G1-5:0	B1-5:4
B1-3:0	R2-5:2
R2-1:0	G2-5:0
B2-5:0	R3-5:4
R3-3:0	G3-5:2
G3-1:0	B3-5:0



京东方
BOE

PRODUCT GROUP

REV

ISSUE DATE

TFT- LCD PRODUCT

P1

SPEC. NUMBER

SPEC. TITLE

PAGE

HB125WX1-100 Preliminary Product Specification

18 OF 36

6.0 SIGNAL TIMING SPECIFICATION

6.1 Timing Parameters

Item	Symbols	Min	Typ	Max	Unit
Clock Frequency	1/Tc	-	70.12	-	MHz
Frame Period	Tv	-	787	-	lines
		-	60	-	Hz
		-	16.7	-	ms
Vertical Display Period	Tvd	-	768	-	lines
One line Scanning Period	Th	-	1485	-	clocks
Horizontal Display Period	Thd	-	1366	-	clocks


 京东方 BOE	PRODUCT GROUP	REV	ISSUE DATE
	TFT- LCD PRODUCT	P1	
SPEC. NUMBER	SPEC. TITLE HB125WX1-100 Preliminary Product Specification	PAGE 19 OF 36	

6.2 eDP Rx Interface Timing Parameter

The specification of the eDP Rx interface timing parameter is shown in Table 8.

<Table 8. eDP Rx Interface Timing Specification>

Item	Symbol	Min	Typ	Max	Unit	Remark
Spread spectrum clock	ssc		0.5		%	
Differential peak-to-peak input voltage at package pins	VRX-DIFFp-p	100	0	1320	mV	
Rx input DC common mode voltage	VRX_DC_CM	-	GND	-	V	
Differential termination resistance	RRX-DIFF	80	-	100	Ω	
Single-ended termination resistance	RRX-SE	40	-	60	Ω	
Rx short circuit current limit	IRX_SHORT	-	-	20	mA	
Intra-pair skew at Rx package pins (HBR) RX intra-pair skew tolerance at HBR	LRX_SKEW_INTRA_PAIR	-	-	150	ps	

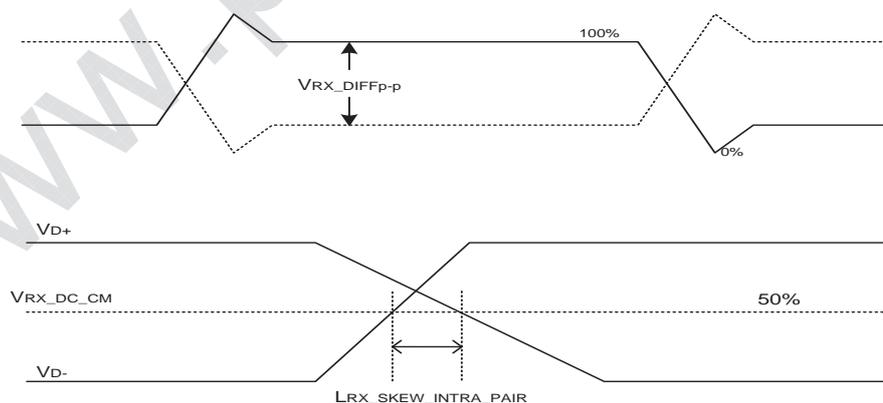



PRODUCT GROUP

REV

ISSUE DATE

TFT- LCD PRODUCT

P1

SPEC. NUMBER

SPEC. TITLE

PAGE

HB125WX1-100 Preliminary Product Specification

20 OF 36

7.0 INPUT SIGNALS, BASIC DISPLAY COLORS & GRAY SCALE OF COLORS


	Colors & Gray scale	Data signal																	
		R0	R1	R2	R3	R4	R5	G0	G1	G2	G3	G4	G5	B0	B1	B2	B3	B4	B5
Basic colors	Black	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Blue	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1
	Green	0	0	0	0	0	0	1	1	1	1	1	1	0	0	0	0	0	0
	Light Blue	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1	1	1	1
	Red	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0
	Purple	1	1	1	1	1	1	0	0	0	0	0	0	1	1	1	1	1	1
	Yellow	1	1	1	1	1	1	1	1	1	1	1	1	0	0	0	0	0	0
	White	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
Gray scale of Red	Black	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	△	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Darker	0	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	△																		
	▽																		
	Brighter	1	0	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0
Gray scale of Green	Black	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	△	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0	0	0	0
	Darker	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0	0	0
	△																		
	▽																		
	Brighter	0	0	0	0	0	0	1	0	1	1	1	1	0	0	0	0	0	0
Gray scale of Blue	Black	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	△	0	0	0	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0
	Darker	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0	0	0	0
	△																		
	▽																		
	Brighter	0	0	0	0	0	0	0	0	0	0	0	0	1	0	1	1	1	1
Gray scale of White & Black	Black	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	△	1	0	0	0	0	0	1	0	0	0	0	0	1	0	0	0	0	0
	Darker	0	1	0	0	0	0	0	1	0	0	0	0	0	1	0	0	0	0
	△																		
	▽																		
	Brighter	1	0	1	1	1	1	1	0	1	1	1	1	1	0	1	1	1	1
White	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	

20

 京东方 BOE	PRODUCT GROUP	REV	ISSUE DATE
	TFT- LCD PRODUCT	P1	
SPEC. NUMBER	SPEC. TITLE	PAGE	
	HB125WX1-100 Preliminary Product Specification	21 OF 36	

8.0 POWER SEQUENCE

To prevent a latch-up or DC operation of the LCD module, the power on/off sequence shall be as shown in below

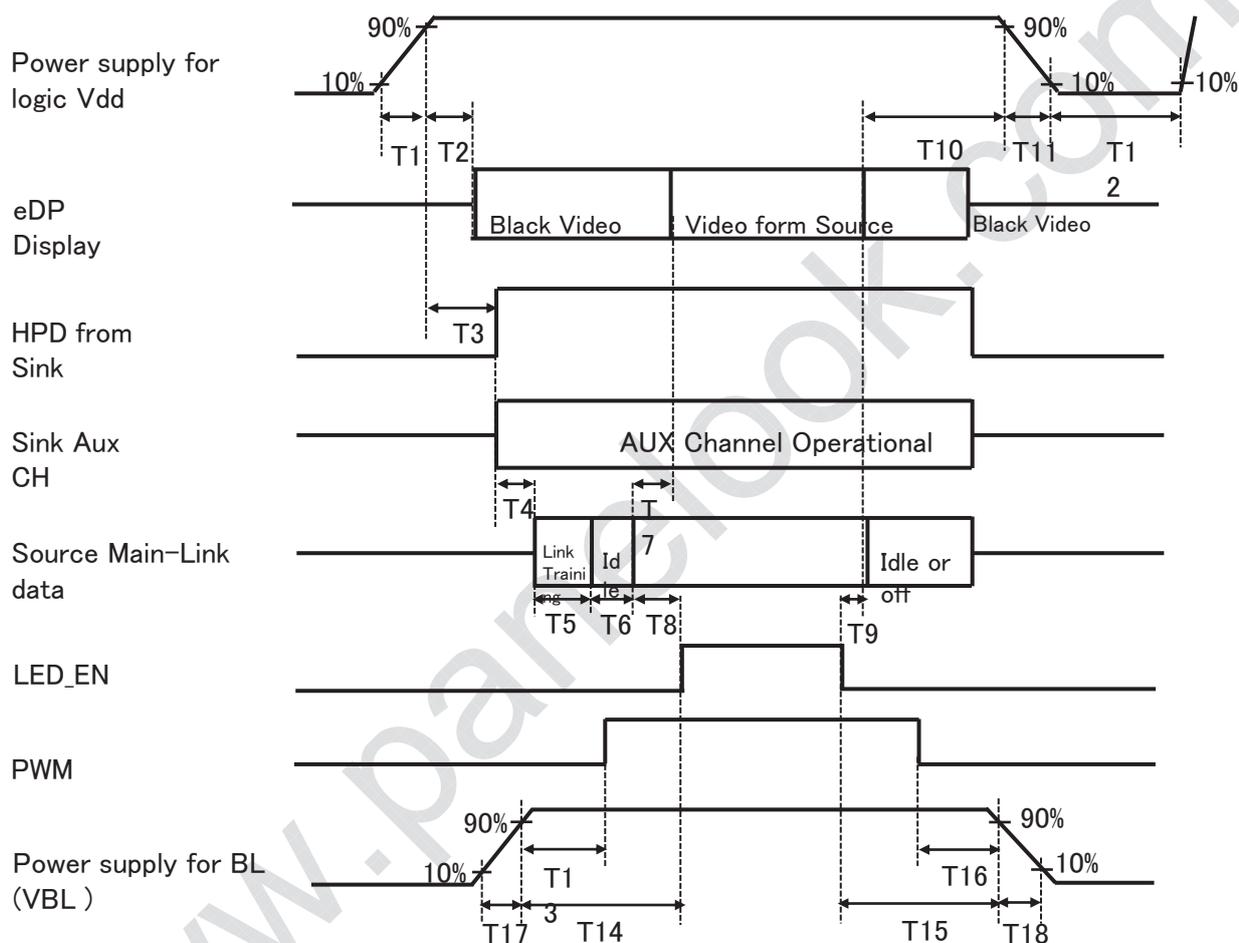

- $0.5\text{ms} \leq T1 \leq 10\text{ms}$
- $0\text{ms} \leq T2 \leq 200\text{ms}$
- $0\text{ms} \leq T3 \leq 200\text{ms}$
- $0\text{ms} \leq T13$
- $0\text{ms} \leq T14$
- $0\text{ms} \leq T17$
- $0\text{ms} \leq T7 \leq 50\text{ms}$
- $0\text{ms} \leq T10 \leq 500\text{ms}$
- $0\text{ms} \leq T11 \leq 10\text{ms}$
- $150\text{ms} \leq T12$
- $0\text{ms} \leq T15$
- $0\text{ms} \leq T16$
- $0\text{ms} \leq T18$

Notes:

- When the power supply VDD is 0V, keep the level of input signals on the low or keep high impedance.
- Do not keep the interface signal high impedance when power is on. Back Light must be turn on after power for logic and interface signal are valid.

 京东方 BOE	PRODUCT GROUP	REV	ISSUE DATE
	TFT- LCD PRODUCT	P1	
SPEC. NUMBER	SPEC. TITLE HB125WX1-100 Preliminary Product Specification		PAGE 22 OF 36

9.0 Connector Description

Physical interface is described as for the connector on LCM.

These connectors are capable of accommodating the following signals and will be following components.

9.1 TFT LCD Module

Connector Name /Description	For Signal Connector
Manufacturer	UJUor Compatible
Type/ Part Number	IS050-L30B-C10 or Compatible
Mating housing/ Part Number	I-PEX 20454-030T or Compatible

 京东方 BOE	PRODUCT GROUP	REV	ISSUE DATE
	TFT- LCD PRODUCT	P1	
SPEC. NUMBER	SPEC. TITLE	PAGE	
	HB125WX1-100 Preliminary Product Specification	23 OF 36	

10.0 MECHANICAL CHARACTERISTICS

10.1 Dimensional Requirements

FIGURE 6 shows mechanical outlines for the model HB140WX1-401. Other parameters are shown in Table 9.

<Table 9. Dimensional Parameters>

Parameter	Specification	Unit
Active Area	276.615 (H) × 155.52(V)	
Number of pixels	1366 (H) X 768 (V) (1 pixel = R + G + B dots)	
Pixel pitch	67.5 × RGB × 202.5	
Pixel arrangement	RGB Vertical stripe	
Display colors	262K	
Display mode	Normally white	
Dimensional outline	300.4(H)*179.5(V)*3.8(Max)	mm
Weight	280 (max)	gram
Back Light	Connector : PF040-B09B-C09	
	LED, Horizontal-LED Array type	

10.2 Mounting

See FIGURE 6.

10.3 Anti-Glare and Polarizer Hardness.

The surface of the LCD has an anti glare coating to maximize readability and hard coating to reduce scratching.

10.4 Light Leakage

There shall not be visible light from the back-lighting system around the edges of the screen as seen from a distance 50cm from the screen with an overhead light level of 350lux.

 京东方 BOE	PRODUCT GROUP	REV	ISSUE DATE
	TFT- LCD PRODUCT	P1	
SPEC. NUMBER	SPEC. TITLE	PAGE	
	HB125WX1-100 Preliminary Product Specification	24 OF 36	

11.0 RELIABILITY TEST

The Reliability test items and its conditions are shown in below.

<Table 10. Reliability test>

No	Test Items	Conditions
1	High temperature storage test	Ta = 60 °C, 240 hrs
2	Low temperature storage test	Ta = -20 °C, 240 hrs
3	High temperature & high humidity operation test	Ta = 50 °C, 80%RH, 240 hrs
4	High temperature operation test	Ta = 50 °C, 240 hrs
5	Low temperature operation test	Ta = 0 °C, 240 hrs
6	Thermal shock	Ta = -20 °C ↔ 60 °C (0.5 hr), 100 cycle
7	Vibration test (non-operating)	1.5G, 10~500Hz, Half Sine X,Y,Z / Sweep rate : 1 hour
8	Shock test (non-operating)	220G, Half Sine Wave 2msec ±X, ±Y, ±Z Once for each direction
9	Electro-static discharge test (non-operating)	Air : 150 pF, 330Ω, 15 KV Contact : 150 pF, 330Ω, 8 KV

12.0 HANDLING & CAUTIONS

- (1) Cautions when taking out the module
 - Pick the pouch only, when taking out module from a shipping package.
- (2) Cautions for handling the module
 - As the electrostatic discharges may break the LCD module, handle the LCD module with care. Peel a protection sheet off from the LCD panel surface as slowly as possible.
 - As the LCD panel and back - light element are made from fragile glass material, impulse and pressure to the LCD module should be avoided.
 - As the surface of the polarizer is very soft and easily scratched, use a soft dry cloth without chemicals for cleaning.
 - Do not pull the interface connector in or out while the LCD module is operating.
 - Put the module display side down on a flat horizontal plane.
 - Handle connectors and cables with care.
- (3) Cautions for the operation
 - When the module is operating, do not lose CLK, ENAB signals. If any one of these signals is lost, the LCD panel would be damaged.
 - Obey the supply voltage sequence. If wrong sequence is applied, the module would be damaged.



	PRODUCT GROUP	REV	ISSUE DATE
	TFT- LCD PRODUCT	P1	
SPEC. NUMBER	SPEC. TITLE HB125WX1-100 Preliminary Product Specification	PAGE 25 OF 36	

14.0 LABEL

(1) Product label



1	2	3	4	5	6	7
X	X	X	X X	1	0 0 X X	X X X X X X

Type designation

No 1. Control Number

No 2. Rank / Grade

No 3. Line classification

No 4. Year (10 : 2010, 11: 2011, ...)

No 5. Month (1, 2, 3, ..., 9, X, Y, Z)

No 6. Product Identification (FG)

No 7. Serial Number

 京东方 BOE	PRODUCT GROUP	REV	ISSUE DATE
	TFT- LCD PRODUCT	P1	
SPEC. NUMBER	SPEC. TITLE HB125WX1-100 Preliminary Product Specification	PAGE 26 OF 36	

(2) Box label

Label Size: 80 mm (L) × 25 mm (W)

Contents


Model: HB125WX1-100

Q`ty: Module Q`ty in one box

Serial No.: Box Serial No. See next figure for detail description.

Date: Packing Date

Internal use of Product

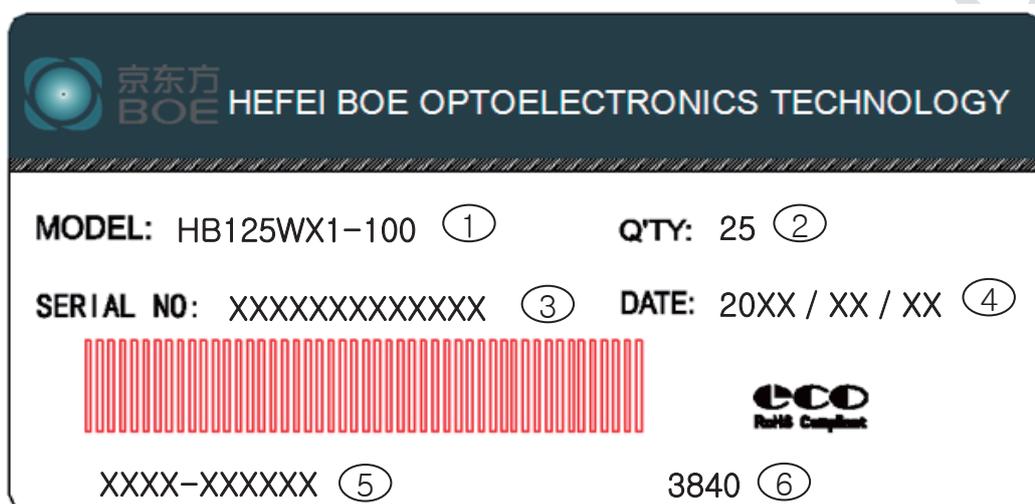

Remark :

1. Module Name
2. Box 产品数量
3. Box ID, 编码规则如下
4. Box Packing 日期
5. 产品物料号(客户端)
6. 内部编码


序号号	1	2	3	4	5	6	7	8	9	10	11	12	13
代码	4	J	P	3	1	2	7	0	0	0	1	H	D
描述	GBN代码		等级	B3	年份		月	Rev	序列号				

 京东方 BOE	PRODUCT GROUP	REV	ISSUE DATE
	TFT- LCD PRODUCT	P1	
SPEC. NUMBER	SPEC. TITLE	PAGE	
	HB125WX1-100 Preliminary Product Specification	27 OF 36	

15.0 PACKING INFORMATION


15.1 Packing order

- 将 1pcs MDL 平放入Tray, Panel 面向上放置EPE Spacer
- 容量: 1pcs/Tray

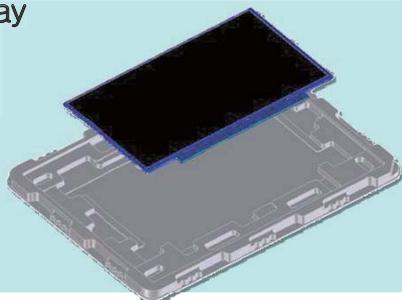


step 1

- 将26pcs PET Tray 平放入PE Bag
- 容量: 25pcs/PE Bag

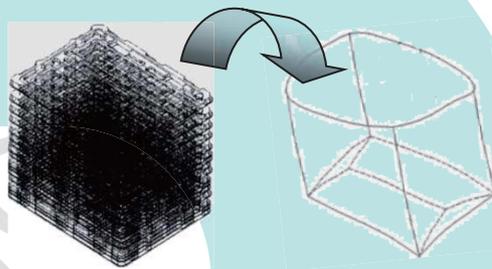


step 2

- 每个Pallet上放3层Box, 1层6箱, 共计18ea Box
- Pallet 四边及打包带位置放置纸护角后, 以缠绕膜包裹
- 容量: 450pcs/Pallet

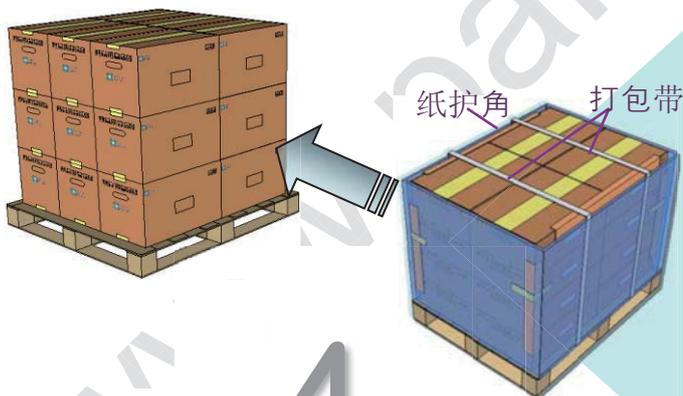

step 4


- 将PET Tray堆码后平放入Inner Box
- 上下放置EPE Board
- 容量: 25pcs/Inner Box

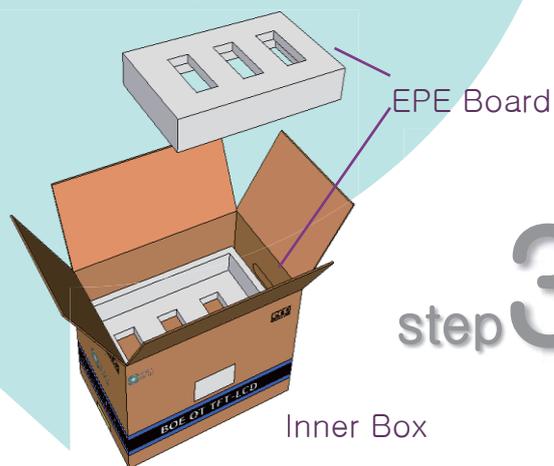

step 3

 京东方 BOE	PRODUCT GROUP	REV	ISSUE DATE
	TFT- LCD PRODUCT	P1	
SPEC. NUMBER	SPEC. TITLE	PAGE	
	HB125WX1-100 Preliminary Product Specification	29 OF 36	

Figure 7. TFT-LCD Module Outline Dimensions (Rear view)

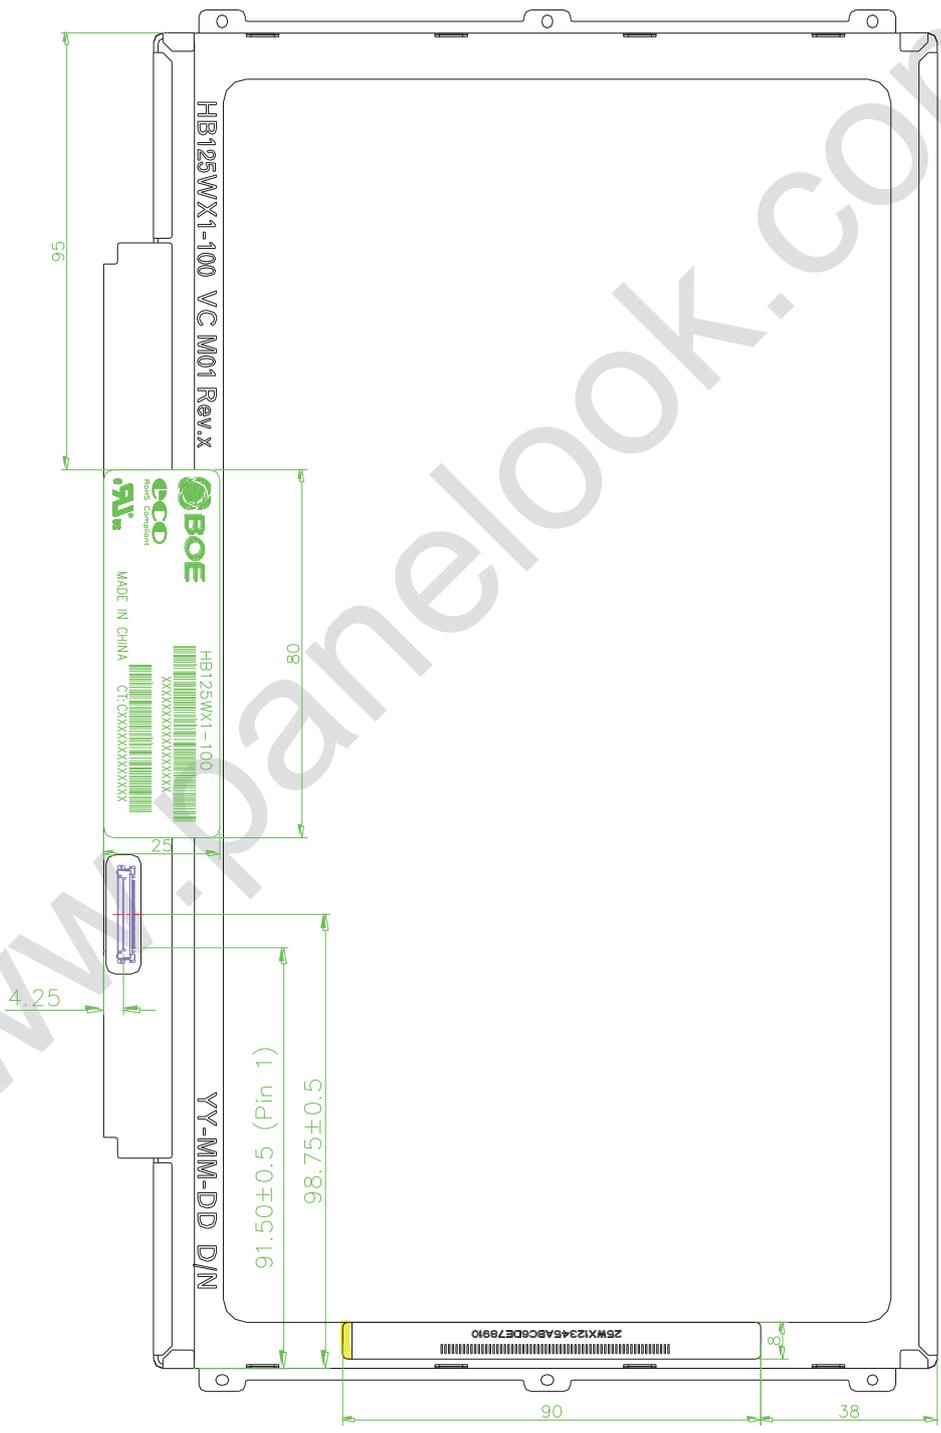

 京东方 BOE	PRODUCT GROUP	REV	ISSUE DATE
	TFT- LCD PRODUCT	P1	
SPEC. NUMBER	SPEC. TITLE	PAGE	
	HB125WX1-100 Preliminary Product Specification	30 OF 36	

16.EDID Table

Address (HEX)	Function	Hex	Dec	Input values.	Notes
00	Header	00	0	0	EDID Header
01		FF	255	255	
02		FF	255	255	
03		FF	255	255	
04		FF	255	255	
05		FF	255	255	
06		FF	255	255	
07		00	0	0	
08	ID Manufacturer Name	09	9	BOE	ID = BOE
09		E5	229		
0A	ID Product Code	F5	245	1525	ID = 1525
0B		05	5		
0C	32-bit serial No.	00	0		
0D		00	0		
0E		00	0		
0F		00	0		
10	Week of manufacture	01	1	1	
11	Year of Manufacture	17	23	2013	Manufactured in 2013
12	EDID Structure Ver.	01	1	1	EDID Ver 1.0
13	EDID revision #	04	4	4	EDID Rev. 0.4
14	Video input definition	95	149	-	
15	Max H image size	1C	28	28	28 cm (Approx)
16	Max V image size	10	16	16	16 cm (Approx)
17	Display Gamma	78	120	2.2	Gamma curve = 2.2
18	Feature support	0A	10		RGB display, Preferred Timming mode
19	Red/Green low bits	B0	176	-	Red / Green Low Bits
1A	Blue/White low bits	90	144	-	Blue / White Low Bits
1B	Red x high bits	97	151	0.592	Red (x) = 10010111 (0.592)
1C	Red y high bits	58	88	0.347	Red (y) = 01011000 (0.347)
1D	Green x high bits	54	84	0.329	Green (x) = 01010100 (0.329)
1E	Green y high bits	92	146	0.571	Green (y) = 10010010 (0.571)
1F	Blue x high bits	26	38	0.151	Blue (x) = 00100110 (0.151)
20	BLue y high bits	1D	29	0.115	Blue (y) = 00011101 (0.115)
21	White x high bits	50	80	0.313	White (x) = 01010000 (0.313)
22	White y high bits	54	84	0.329	White (y) = 01010100 (0.329)
23	Established timing 1	00	0	-	
24	Established timing 2	00	0	-	

R2010-6053-O(3/3)

A4(210 X 297)

 京东方 BOE	PRODUCT GROUP			REV	ISSUE DATE
	TFT- LCD PRODUCT			P1	
SPEC. NUMBER	SPEC. TITLE				PAGE
	HB125WX1-100 Preliminary Product Specification				31 OF 36
25	Established timing 3	00	0	-	
26	Standard timing #1	01	1		Not Used
27		01	1		
28	Standard timing #2	01	1		Not Used
29		01	1		
2A	Standard timing #3	01	1		Not Used
2B		01	1		
2C	Standard timing #4	01	1		Not Used
2D		01	1		
2E	Standard timing #5	01	1		Not Used
2F		01	1		
30	Standard timing #6	01	1		Not Used
31		01	1		
32	Standard timing #7	01	1		Not Used
33		01	1		
34	Standard timing #8	01	1		Not Used
35		01	1		
36	Detailed timing/monitor descriptor #1	64	100	70.1	70.12MHz Main clock
37		1B	27		
38		56	86	1366	Hor Active = 1366
39		77	119	119	Hor Blanking = 119
3A		50	80	-	4 bits of Hor. Active + 4 bits of Hor. Blanking
3B		00	0	768	Ver Active = 768
3C		13	19	19	Ver Blanking = 19
3D		30	48	-	4 bits of Ver. Active + 4 bits of Ver. Blanking
3E		30	48	48	Hor Sync Offset = 48
3F		20	32	32	H Sync Pulse Width = 32
40		44	68	4	V sync Offset = 4 line
41		00	0	4	V Sync Pulse width : 4 line
42		15	21	277	Horizontal Image Size = 277 mm (Low 8 bits)
43		9C	156	156	Vertical Image Size = 156 mm (Low 8 bits)
44		10	16	-	4 bits of Hor Image Size + 4 bits of Ver Image Size
45		00	0	0	Hor Border (pixels)
46	00	0	0	Vertical Border (Lines)	
47	1A	26		Refer to right table	

R2010-6053-O(3/3)

A4(210 X 297)

 京东方 BOE	PRODUCT GROUP	REV	ISSUE DATE
	TFT- LCD PRODUCT	P1	
SPEC. NUMBER	SPEC. TITLE	PAGE	
	HB125WX1-100 Preliminary Product Specification	32 OF 36	

Address (HEX)	Function	Hex	Dec	crc	Input values.	Notes
48	Detailed timing/monitor descriptor #2	84	132		60.2	50.9MHz Main clock
49		17	23			
4A		56	86		1366	Hor Active = 1366
4B		80	128		384	Hor Blanking = 244
4C		51	81		-	4 bits of Hor. Active + 4 bits of Hor. Blanking
4D		00	0		768	Ver Active = 768
4E		5C	92		92	Ver Blanking = 92
4F		30	48		-	4 bits of Ver. Active + 4 bits of Ver. Blanking
50		64	100		100	Hor Sync Offset = 100
51		64	100		100	H Sync Pulse Width = 100
52		44	68		20	V sync Offset = 20 line
53		05	5		20	V Sync Pulse width : 20 line
54		15	21		277	Horizontal Image Size = 277 mm (Low 8 bits)
55		9C	156		156	Vertical Image Size = 156 mm (Low 8 bits)
56		10	16		-	4 bits of Hor Image Size + 4 bits of Ver Image Size
57		00	0		0	Hor Border (pixels)
58		00	0		0	Vertical Border (Lines)
59		1A	26			Refer to right table
5A	Detailed timing/monitor descriptor #3	00	0			Nvidia nvDPS Lowest refresh rate that does not cause any visual/optical side effect
5B		00	0			
5C		00	0			
5D		00	0			
5E		00	0			
5F		00	0			
60		00	0			
61		00	0			
62		00	0			
63		00	0			
64		00	0			
65		00	0			
66	00	0				
67	00	0				
68	00	0				
69	00	0				
6A	00	0				
6B	00	0				

R2010-6053-O(3/3)

A4(210 X 297)

 京东方 BOE	PRODUCT GROUP	REV	ISSUE DATE
	TFT- LCD PRODUCT	P1	
SPEC. NUMBER	SPEC. TITLE	PAGE	
	HB125WX1-100 Preliminary Product Specification	33 OF 36	

Address (HEX)	Function	Hex	Dec	crc	Input values.	Notes
6C	Detailed timing/monitor descriptor #4	00	0		0	Detailed Timing Description #4
6D		00	0		0	Flag
6E		00	0		0	Reserved
6F		02	2			For Brightness Table and Power consumption
70		00	0		0	Flag
71		0C	12			PWM % [7:0] @ Step 0
72		4F	79			PWM % [7:0] @ Step 5
73		9E	158			PWM % [7:0] @ Step 10
74		0A	10			Nits [7:0] @ Step 0
75		3C	60			Nits [7:0] @ Step 5
76		64	100			Nits [7:0] @ Step 10
77		11	17			Panel Electronics Power @32x32 Chess Pattern=
78		16	22			Backlight Power @60 nits=
79		17	23			Backlight Power @Step 10=
7A		6E	110			Nits @ 100% PWM Duty =
7B		00	0		0	Flags
7C		00	0		0	Flags
7D	00	0		0	Flags	
7E	Extension flag	00	0			
7F	Checksum	D9	217	217	-	